
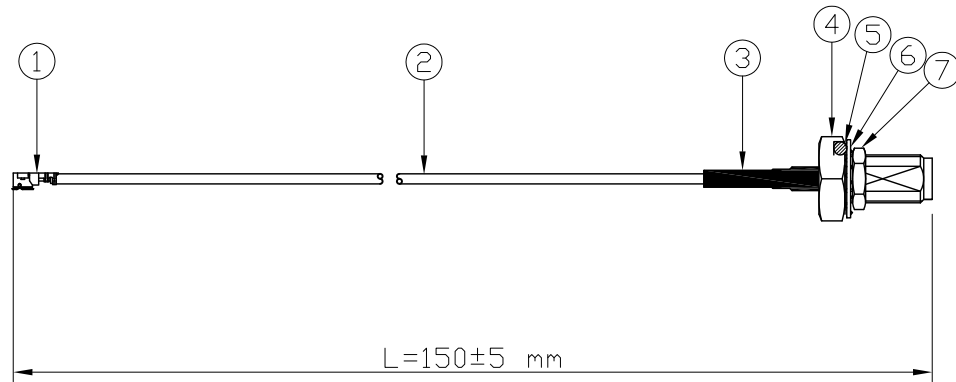


RoHS COMPLIANT

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
1.00	INITIAL DESIGN	2023/03/07	



Note:

- (1) The orientation should be the same as shown.
- (2) 100% Continuity, Short circuit test.
- (3) Assembly exclude IPEX according to IPC/WHMA-A-620.
- (4) Screw washer and nut on SMA connector.

07	Nut	1	
06	Washer	1	
05	O-ring (Red)	1	
04	SMA bulk Jack HEX11.0 with O-ring	1	C02AD31132005
03	Heat shrink (Black)	1	
02	1.32 Single shield coaxial cable (Gray)	1	D1320XX5GS
01	I-PEX MHF 1 Plug	1	20278-112R-32
NO	DESCRIPTION	Q'TY	ITEM

TITLE				IPEX to 1.32(GR) to SMA(F)st.bh.w/oring.,L=150mm			
DWG NO. 230307-05A		CUST. P/N: N/A		UNIT mm		REV. 1.00	
P/N BF082WS230307-05A		DWG NO: N/A		SCALE 1 : 1		APPROVALS	
GENERAL TOLERANCES		SCALE 1 : 1		APPROVALS		DATE	
.X	N/A	SIZE A4		APPROVALS		DATE	
.XX	N/A	SIZE A4		APPROVALS		DATE	
.XXX	N/A	SIZE A4		APPROVALS		DATE	
ANGLES	N/A	SIZE A4		APPROVALS		DATE	
(UNLESS OTHERWISE SPECIFIED)				SHEET 1 of 1		DATE	

